INDIVIDUAL DESIGN / ZE-08

Cedar Executive Office

1-storey portable office / 200 sq ft enclosed

A 10 x 20 ft portable office with vertical cedar siding, asymmetric graphite shed roof, tall black front glazing.



ORIGINAL EXTERIOR CONCEPT / CLIENT REFERENCE INSPIRED

10' x 20'

200 SQ FT ENCLOSED / 1 STOREY


FLOOR PLANS + FOUR EXTERIOR VIEWS

ISLAMABAD / DESIGN COLLECTION 2026

01 / MEASURED SPACE

Ground floor. A distinct layout.

Nominal dimensions in feet. Floor-zone areas exclude wall deductions; furniture and openings are schematic.

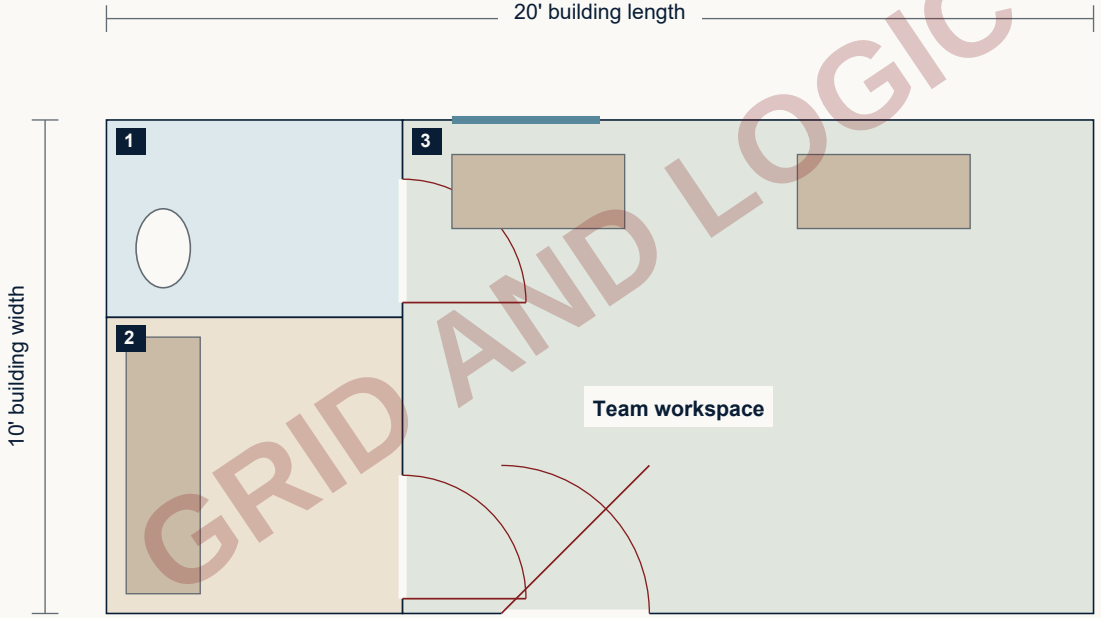

GRID AND LOGIC

ZONE SCHEDULE / DIMENSIONS IN FEET

01 Washroom
6' x 4' / 24 sq ft

02 Entry / pantry
6' x 6' / 36 sq ft

03 Team workspace
14' x 10' / 140 sq ft

Blue: glazing / Red: indicative doors. Coordinate room access and opening positions in the detailed design.

02 / EXTERIOR DESIGN

The same design. Every side.

Four original visualizations illustrate this individual concept. Openings and construction details remain schematic.



FRONT / ENTRY FACADE

20' nominal span / 1 enclosed storey



REAR / SERVICE FACADE

20' nominal span / 1 enclosed storey

FINISH DIRECTION: Vertical cedar siding, asymmetric graphite shed roof, tall black front glazing.

Images depict a concept finish. Exact window locations, heights, stairs and roof assemblies are coordinated with the measured layout before fabrication.

02 / EXTERIOR DESIGN

The same design. Every side.

Four original visualizations illustrate this individual concept. Openings and construction details remain schematic.

AND LOGIC



LEFT / END VIEW

10' nominal span / 1 enclosed storey



RIGHT / END VIEW

10' nominal span / 1 enclosed storey

FINISH DIRECTION: Vertical cedar siding, asymmetric graphite shed roof, tall black front glazing.

Images depict a concept finish. Exact window locations, heights, stairs and roof assemblies are coordinated with the measured layout before fabrication.

03 / MATERIALS & PROGRAMME

Details for this design.

A defined visual direction and spatial brief for the project quotation.

GRID AND LOGIC

Building	10 x 20 ft footprint; 1 enclosed storey(s); 0 bedroom(s).
Enclosed floor area	200 sq ft per floor / 200 sq ft total, before wall deductions.
Exterior palette	Vertical cedar siding, asymmetric graphite shed roof, tall black front glazing.
Roof & outdoor space	Roof profile follows the exterior concept; structure and drainage to be designed.
Structure	Fabricated or joined steel modules; foundation, openings, connections and lifting points engineered for site conditions.
Comfort & finish	Insulated walls and roof; selected internal linings and floor finish; washable wet-area surfaces.
Glazing & doors	Opening schedule coordinated with rooms, privacy, escape and ventilation; safety glass and hardware specified individually.
Electrical & services	Power, lighting, sockets and data developed to suit use. Plumbing, water supply and drainage coordinated with available site services.
Circulation & access	Door swings and furniture are indicative; confirm finished clearances and accessible circulation.
Delivery & installation	Transport route, crane access, supports, anchoring and connections agreed before manufacture.

Concept proposal only. Final engineering, quantities, approvals and price are established for the selected design and site.

05 / MAKE IT YOURS

A clear plan for your next step.

Bring us your site and requirements. We will help develop the layout, scope, and quotation for your project.

GRID AND LOGIC

BEFORE WE DESIGN

01 Intended use and number of occupants

02 City, site access and available footprint

03 Preferred room layout and finish palette

04 Available power, water and drainage

05 Budget range and desired delivery timeline

LET'S BUILD YOUR SPACE.

Zaka Engineering Containers & Prefab (Pvt. Ltd.)

+92 340 5221225

zakaurrehman3020@gmail.com

zakaengineeringcontainers.com

Main Jinnah Avenue, near Bukhari Chowk (Attock Petrol), New Mal, Islamabad

REFERENCE & DESIGN NOTES

Architecture direction informed by client-assets references, then developed as an original concept. All measurements are nominal feet; wall thicknesses are not deducted. Wider modules require fabricated or joined frames. Original drawings in this catalogue are newly authored schematic interpretations, not reproductions of approved engineering drawings.