WORKSPACE / PORTABLE SPACES

Portable *Office*

A focused place to work. Ready for your next site.

A 8 x 20 ft portable workspace with a dedicated 14 x 8 ft office zone, a compact washroom and an entrance/pantry bay. Perimeter furniture leaves a central path for daily circulation.

8' x 20'

160 SQ FT / ENCLOSED NOMINAL AREA

DESIGN / FABRICATE / DELIVER



FINISHED EXTERIOR / ILLUSTRATIVE ARCHITECTURAL RENDER


ISLAMABAD, PAKISTAN

DESIGN COLLECTION 2026

01 / THE LAYOUT

Every foot has a purpose.

Overall and room-zone measurements are in feet. Zones are nominal; wall thicknesses are not deducted.

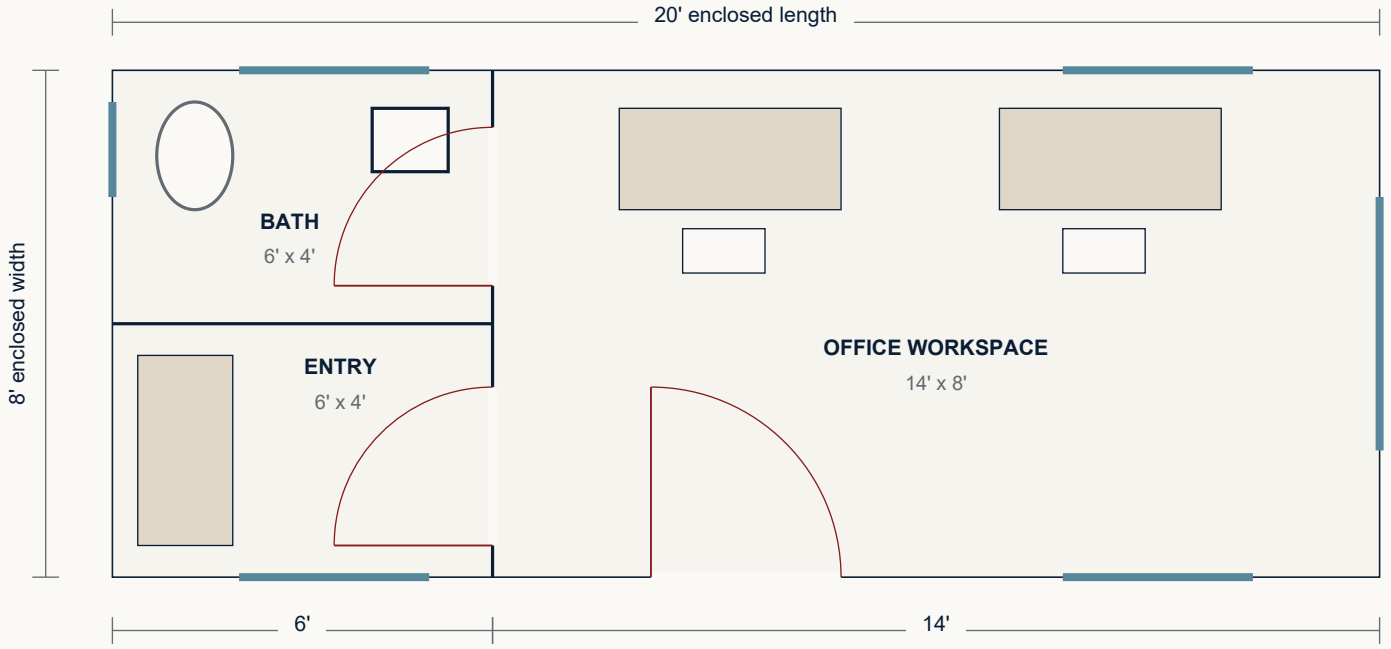

NOMINAL SPACE SCHEDULE

Office workspace
14' x 8' / 112 sq ft

Washroom
6' x 4' / 24 sq ft

Entry / pantry
6' x 4' / 24 sq ft

Blue: glazing. Red arcs: indicative door swings. Furniture is illustrative. Zone areas sum to the enclosed gross footprint; terrace area is additional. Final clearances and openings are developed with the client.

02 / EXTERIOR VIEWS

A finished view from every side.

Original architectural visualizations of the proposed finish. Rendered proportions and materials are illustrative.



FRONT / LONG FACADE

20' nominal facade span

Centered glazed entrance with daylight windows.



REAR / LONG FACADE

20' nominal facade span

Window openings for daylight and cross ventilation.

Finish direction: light corrugated steel, navy frames, dark aluminum glazing and a restrained brick-red roof detail. Final finish, roof build-up and opening sizes are agreed before fabrication.

03 / EXTERIOR VIEWS

A finished view from every side.

Original architectural visualizations of the proposed finish. Rendered proportions and materials are illustrative.



LEFT / SHORT END

8' nominal facade span

High-level glazing at the bathroom service bay.



RIGHT / SHORT END

8' nominal facade span

End glazing for additional daylight.

Finish direction: light corrugated steel, navy frames, dark aluminum glazing and a restrained brick-red roof detail. Final finish, roof build-up and opening sizes are agreed before fabrication.

04 / MATERIALS & SYSTEMS

The details make the difference.

An outline schedule for client discussion. Material grades, thicknesses, capacity, and performance are confirmed in the project quotation.

SYSTEM	OUTLINE REQUIREMENT
Structure	Steel container or fabricated prefab frame; openings and reinforcement to be engineered for the approved layout.
Exterior finish	Protective primer and coating system selected for exposure, maintenance needs, and the agreed colour palette.
Insulation	Wall and roof insulation specification to be agreed for local climate, comfort, and budget.
Internal linings	Insulated panel or board lining; washable finishes in wet areas and an agreed finish in occupied spaces.
Floor assembly	Existing or fabricated base with a selected floor finish; wet-area waterproofing and thresholds to be detailed.
Doors & glazing	Aluminum-framed windows and selected entrance doors; safety glass and hardware specified by opening type.
Electrical & data	Lighting, socket and data-point schedule to be agreed; supply requirements and local earthing verified for the site.
Climate & ventilation	Ventilation and optional air conditioning sized for occupancy, heat gain, climate, and operating requirements.
Plumbing & drainage	Supply, waste, and sanitary connections coordinated with site services where included in the final scope.
Delivery & installation	Route access, lifting, support design, anchoring, and service connections agreed before dispatch.

No compliance certification, structural approval, acoustic rating, or fixed cost is asserted by this concept catalogue. Those items require project-specific verification.

05 / MAKE IT YOURS

A clear plan for your next step.

Bring us your site and requirements. We will help develop the layout, scope, and quotation for your project.

BEFORE WE DESIGN

01 Intended use and number of occupants

02 City, site access and available footprint

03 Preferred room layout and finish palette

04 Available power, water and drainage

05 Budget range and desired delivery timeline

LET'S BUILD YOUR SPACE.

Zaka Engineering Containers & Prefab (Pvt. Ltd.)

+92 340 5221225

zakaurrehman3020@gmail.com

zakaengineeringcontainers.com

Main Jinnah Avenue, near Bukhari Chowk (Attock Petrol), New Mal, Islamabad

REFERENCE & DESIGN NOTES

Client size brief and supplied container-room and office reference proposals. Widths above a standard shipping container require a fabricated or joined-module solution. Original drawings in this catalogue are newly authored schematic interpretations, not reproductions of approved engineering drawings.