SPACES THAT GO FURTHER

Two Cabin *Office*

Private workspaces. A shared footprint.

Two private office cabins are connected through a central shared entry zone with a compact washroom. A practical concept for teams that need privacy within a small footprint.

8' x 20'

160 SQ FT / NOMINAL FOOTPRINT

A CONCEPT. YOUR STARTING POINT.

Final design, scope and quotation are developed around your site and requirements.



GRID AND LOGIC

ARCHITECTURAL VISUALIZATION / ILLUSTRATIVE CONCEPT


ISLAMABAD, PAKISTAN

DESIGN / FABRICATE / DELIVER

01 / THE LAYOUT

Designed around daily use.

Nominal planning zones; final clear dimensions depend on the approved wall build-up.

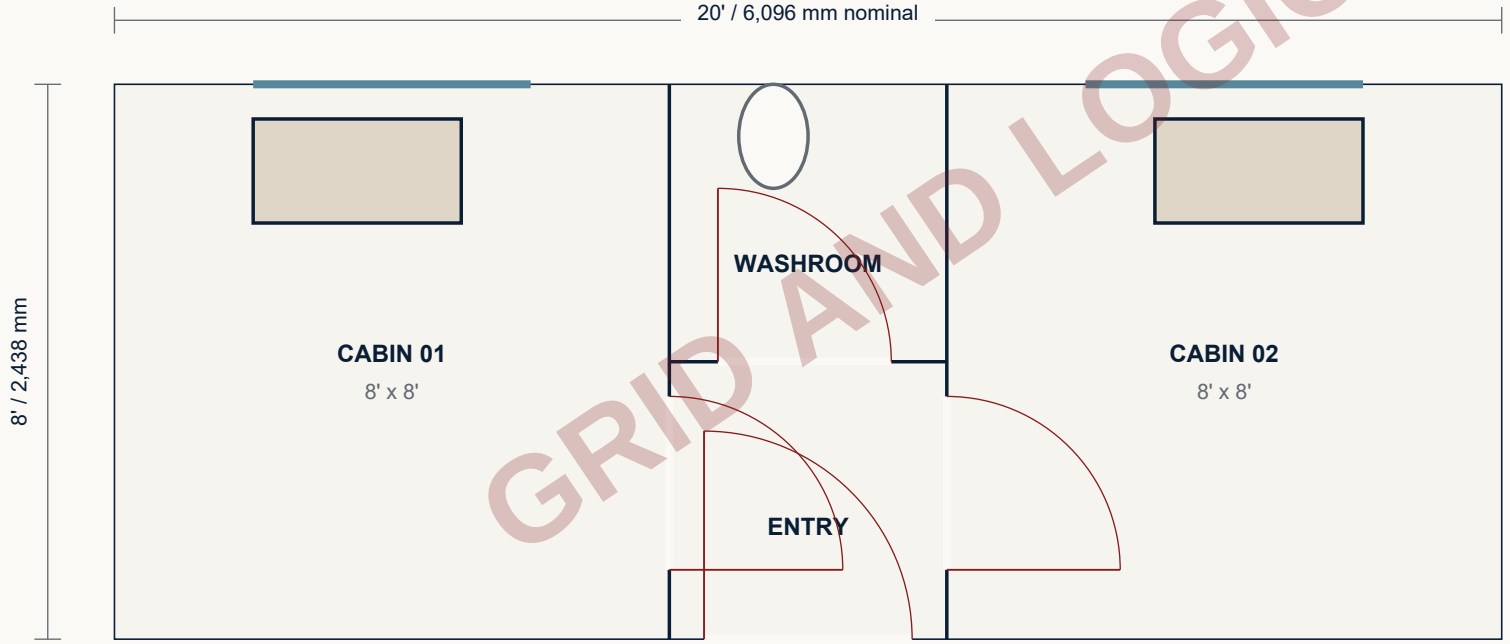

CONCEPT FLOOR PLAN

Dimensions in feet / NTS

THE SPACE SCHEDULE


Cabin 01	Cabin 02	Entry lobby	Washroom
8' x 8' / 64 sq ft	8' x 8' / 64 sq ft	4' x 4' / 16 sq ft	4' x 4' / 16 sq ft

Area figures are gross nominal zones, not clear usable areas. Bathrooms within residential bedroom zones are included, not added to the total.


02 / THE ENVELOPE

A considered exterior.

Window and door arrangements illustrate the design language; positions and sizes are finalized with your layout.

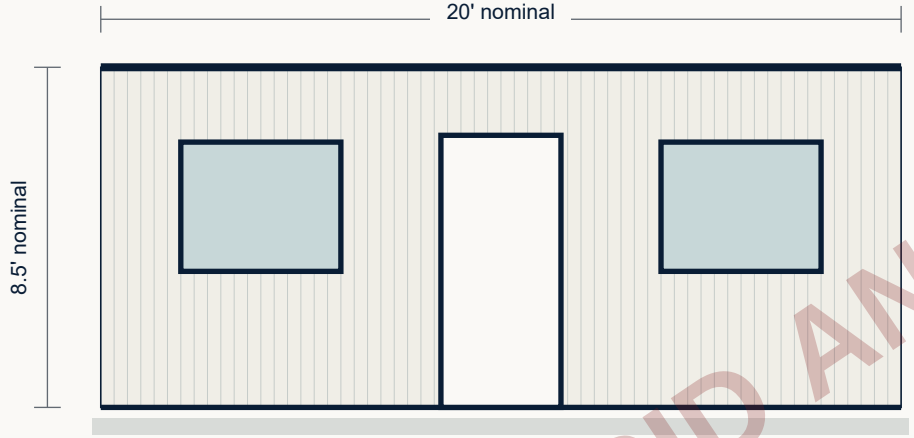

A-A / FRONT ELEVATION

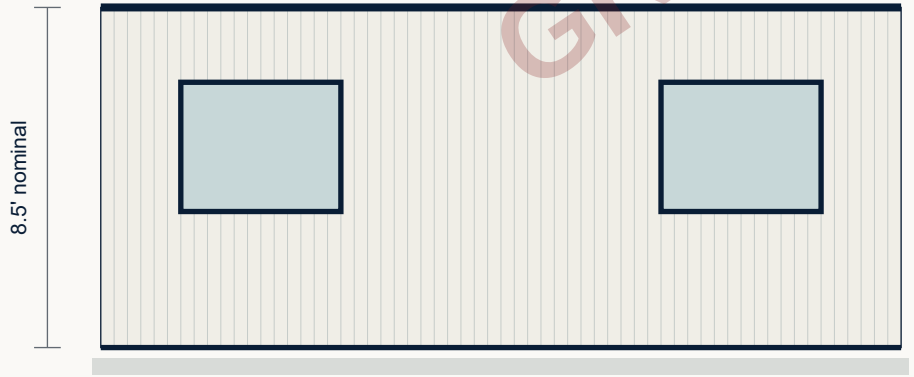

B-B / REAR ELEVATION

01 / Corrugated steel shell

Durable steel construction with an exterior coating selected for the site and exposure.

02 / Natural light

Aluminum-framed glazing and opening windows can be selected to suit daylight and ventilation needs.

03 / Your finish palette

A restrained selection of light cladding, navy frames, warm timber accents, and brick-red brand details.

GRID AND LOGIC

03 / MATERIALS & SYSTEMS

The details make the difference.

An outline schedule for client discussion. Material grades, thicknesses, capacity, and performance are confirmed in the project quotation.

GRID AND LOGIC

SYSTEM	OUTLINE REQUIREMENT
Structure	Steel container or fabricated prefab frame; openings and reinforcement to be engineered for the approved layout.
Exterior finish	Protective primer and coating system selected for exposure, maintenance needs, and the agreed colour palette.
Insulation	Wall and roof insulation specification to be agreed for local climate, comfort, and budget.
Internal linings	Insulated panel or board lining; washable finishes in wet areas and an agreed finish in occupied spaces.
Floor assembly	Existing or fabricated base with a selected floor finish; wet-area waterproofing and thresholds to be detailed.
Doors & glazing	Aluminum-framed windows and selected entrance doors; safety glass and hardware specified by opening type.
Electrical & data	Lighting, socket and data-point schedule to be agreed; supply requirements and local earthing verified for the site.
Climate & ventilation	Ventilation and optional air conditioning sized for occupancy, heat gain, climate, and operating requirements.
Plumbing & drainage	Supply, waste, and sanitary connections coordinated with site services where included in the final scope.
Delivery & installation	Route access, lifting, support design, anchoring, and service connections agreed before dispatch.

No compliance certification, structural approval, acoustic rating, or fixed cost is asserted by this concept catalogue. Those items require project-specific verification.

04 / MAKE IT YOURS

A clear plan for your next step.

Bring us your site and requirements. We will help develop the layout, scope, and quotation for your project.

BEFORE WE DESIGN

01 Intended use and number of occupants

02 City, site access and available footprint

03 Preferred room layout and finish palette

04 Available power, water and drainage

05 Budget range and desired delivery timeline

LET'S BUILD YOUR SPACE.

Zaka Engineering Containers & Prefab (Pvt. Ltd.)

+92 340 5221225

zakaurrehman3020@gmail.com

zakaengineeringcontainers.com

Main Jinnah Avenue, near Bukhari Chowk (Attock Petrol), New Mal, Islamabad

GRID AND LOGIC

REFERENCE & DESIGN NOTES

Two-cabin 8 x 20 office catalogue (zaka1.pdf). Original drawings in this catalogue are newly authored schematic interpretations, not reproductions of approved engineering drawings.